



TATA MOTORS LIMITED

One Indiabulls Centre, Tower 2A, 14th Floor, 841, S.B Marg, Mumbai 400 013, Tel - 91 22 67577200, www.cvglobal.tatamotors.com

TATA MOTORS



CONSIDER IT. . . . DONE!



XENON



Tata Motors, one of the top commercial vehicle manufacturers of the world, proudly presents Tata Xenon.

This ever ready, rugged, powerful workhorse will take on any challenge on its way to deliver the task you assign to it.

It's intelligent design and advanced technology are committed to provide you the best in class economy and safety balanced with comfort and style.

Its robust design makes it an unstoppable machine paying off every mile it runs. Its new age styling will eclipse all its forerunners with its looks and muscles.

Just ignite your Tata Xenon now and all that you dream in mind. **Consider it done!**

شركة تاتا موتورز، من أكبر صانعي السيارات التجارية في العالم تقدم تاتا زينون بكل فخر و اعتزاز.

وهي دائماً الاستعداد، قوي البنية، عامل جبار تأخذ على كافة التحديات في طريقها لتسليم المهمة التي تفوضها.

تلتزم التصميم الذكي والتكنولوجيا المتقدمة لها بتزويدك أفضل في الدرجة السياحية والسلامة المتوازنة مع الراحة والألفة.

إن التصميم القوي لهذه السيارة يجعلها من جهاز لا يمكن وقفها والتي تؤدي ثمارها كل ميل يتم تشغيله. سوف يفوق تصميمها المصري كافة المتقدمين بمظهرها الفخرف و قوتها الباردة.

والآن إبتل فقط مصابيح تاتا الخاص بك و كل ما كنت لديك أحلام في عينيك، لتغيرها قد تحققت!



BUILT FOR LIFETIME.

بنيت لمدى الحياة

Xenon's toughest in class chassis with technologically advanced body is built to last a lifetime.

Its rugged front and rear suspensions with torsion bar are designed to withstand any terrain on its way making the vehicle truly versatile that will drive you anytime, anywhere.

Powerhouse of 2.2 D4D engine is tested for millions of kms across the harshest terrains on earth to prove that it will stand by your side to deliver new bench marks everyday.

زبلون هي أصعب في درجة حاوية مع الجسم المتقدم من الناحية التكنولوجية بنيت لتستمر لمدى الحياة.

تم تصميم جبهةها وعرة والتعليق الخلفي مع شريط الالتواء على نحو يمكنها على تحمل أية تضاريس في طريقها و يجعل السيارة متعددة الاستخدامات حقاً التي من شأنها أن تتفعل لك في أي وقت وفي أي مكان.

يتم اختبار قوة المحرك من 2.2 دايكر لملايين من كيلومتر عبر أفسى للتضاريس على وجه الأرض لإثبات أنه سوف يقف بجانبك لتقديم معايير جديدة كل يوم.



Tested And Proved Engine
المحرك المختبر و الثابت



Strongly Built Chassis
الشاسيه بنيت بقوة



Engine Protection
محمية المحرك



Heavy Duty Suspension
With Torsion Bar

تعلق الواجهات الثقيلة مع شريط للتواء

TAKES ON EVERY CHALLENGE.


تأخذ على كافة التحديات

Business is a challenge and Xenon helps you in taking every challenge head on with its powerful engine and superior offroad capabilities 4x4 with limited slip differential.

Xenon has an excellent loading and towing abilities and a fast pickup because of a very flat torque curve [320 Nm @ 1700 rpm to 2700 rpm]. The ECU ensures fault detection and defect prevention. Its high ground clearance that provides ability to take on unfavorable roads, lowest in class centre of gravity and a wide track that gives a larger footprint for superior road holding, makes the vehicle a reliable business partner.

العمل هو تحدي و زيون تساعدك في اتخاذ كل تحدي على رأسها مع محركها القوي و قدرات متفوقة في الطرق الوعرة 4x4 مع التفاضلية المحدودة الأتار لاق.

تتمتع زيون بقرات التحميل و القطار الممتازة و سريع الالتقاط بسبب وجود منحنى عزم الدوران مسطحة جدا (٣٢٠ نيوتن متر @ ١٧٠٠ دورة في الدقيقة إلى ٢٧٠٠ دورة في الدقيقة). ويضمن ECU الكشف عن الخطأ و أليات الوقاية من كل عيب. إذ أنها من الأرض المرتفعة توفر القدرة على اتخاذ على الطرق غير المواتية، أدنى في مركز الدرجة الجاذبية و واسعة المسار الذي يعطي أكر بصمة لسطح الطريق متفوقة مما يجعل السيارة شريكا تجاريا يمكن الاعتماد عليها.



Wide Approach & Departure Angle
واسعة النهج و مغادرة الزاوية



4 x 4 Technology
تكنولوجيا 4X4

Limited Slip Differential
تفاضلية الزاوية المحدودة



Makes Your Xenon Unstoppable
تجعل زيون الخاصة بك لا يمكن وقفها





RIGHT ON PROMISES, LIGHT ON WALLET.

صادقة في الوعود، خفيفة على المحفظة

Xenon promises to pay-off for every mile it runs.

It comes at an affordable price with attractive financing options. The Diesel powered 2.2 litre DICOR engine and the Gasoline powered 2.1 Litre MPFI engines provide the best in class mileage & low maintenance cost ensuring that it remains light on your wallet.

Its competitive top speed allows you quicker turn-around to give you those extra trips per day. Here stands the Xenon offering you a complete solution at lowest overall cost of ownership.

زيتون تحبك لنفع الثمرة عن كل ميل تجري.

تأتي بالسعر في متناول الجميع مع خيارات التمويل الجاذبة. ٢.٢ لتر ديزل محرك مدعم بأفضل و 2.1 لتر MPFI مدعم بكافيت الصيانة المنخفضة تضمن أن تبقى هذه خفيفة على محفظتك.

سرعتها التنافسية من درجة عليا تسمح لك أسرع التحول لتعطيك تلك الرحلات الإضافية في اليوم. تلف هنا زيتون تعرض لك حلا كاملا بتكلفة أقل الإجمالية للملكية.

Big On Space
كبير في المساحة



Best In Class Mileage
الأفضل في فئة الكيلومترات المقطوعة



Low Maintenance
تكلفة الصيانة المنخفضة



Light On Wallet
خفيفة على المحفظة



Quick Fault Finding (ECU)
التعور السريع على خطأ

STYLISH OUTSIDE, SMART INSIDE.

أنيقة في الخارج، ذكية في الباطن

Tata Xenon's aggressive stance is an outcome of muscular flared wheel-arch and stylish streamlined body panel. Its ORVM with turn indicators and chrome grill is a sure recipe to get a second look. Its mere road-presence will fear its forerunners away.

Xenon's best in class door opening angles allow you comfortable entry and exit. Smartly provided spaces on door panels accommodate your other smaller but important things conveniently.

موقف تاتا زينون العدوانى هو نتيجة قوس المحجة مندلع العضلات و لوحة الجسم الأليقة المبسطة. إن ORVM لها مع مؤشر ات دوران والكروم المصبغة هي وصفة أكيدة للحصول على نظرة ثانية. وعلى مجرد وجودها في الطرق يفوت سابقاتها بعددا.

زوايا فتح الباب لزينون الأفضل في درجة تسمح لك الدخول والخروج مريحة. هناك المكان الموفر بنكاه على ألواح الأبواب يستوعب الأشياء الأخرى الصغرى ولكن مهمة الخاصة بك مريحة.



Best In Class Interior Space
الأفضل في فئة المساحة الداخلية



HVAC With Pollen Filter
ايچ وي اى سي مع فلتير جيوب اللقاح



Smart Storage
التخزين الذكي



Stylish ORVM
او آر وي ايم الأليقة



Chrome Grill
الكروم المصبغة





SWORN TO YOUR SAFETY.

نقسم على سلامتك



Safety Crumple Zone
أجزاء السلامة المصددة



Side Impact Beams
المصدات الجانبية الأخرى



Tata Xenon is committed to your complete safety at all times.


Its front safety crumple zones and side impact beams keep you safe from accidental impact from any side of the vehicle. Its antilock braking system never lets you off the track whatever may the road condition be.

Its high raised seats give you better road visibility and assures a safe drive.


تاتا زينون ملتزم بسلامتك كاملة في جميع الأوقات.

إن أجزاء السلامة المصددة الأمامية لها و المصدات الجانبية تحميكم من تأثير سداً من أي جهة من السيارات و نظام الكبح الواقية لن ينجح لك خارج المسار مهما كان الوضع يكون الطريق.


إنما المقاعد المطروحة العالية تتيح لك أحسن رؤية للطريق ويضمن لقيادة آمنة.




REAR VIEW
(DOUBLE CAB / SINGLE CAB)

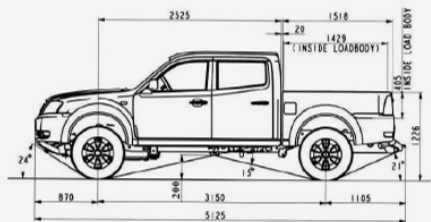


SIDE VIEW DOUBLE CAB




FRONT VIEW
(DOUBLE CAB / SINGLE CAB)

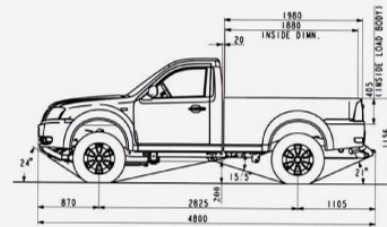

SIDE VIEW SINGLE CAB

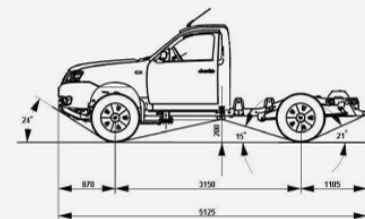

SIDE VIEW
SINGLE CAB CHASSIS




REAR VIEW
SINGLE CAB CHASSIS

TECHNICAL SPECIFICATIONS


VARIANT	XENON 2.2 DICOR (DIESEL)	XENON 3.0 DICOR (DIESEL)	XENON 2.1 MPFI (Petrol)
ENGINE			
Type	Water cooled, Direct Injection Common Rail (DICOR), Turbocharged Intercooled Diesel Engine with EGR	Water cooled, Direct Injection Common Rail (DICOR), Turbocharged Intercooled Diesel Engine with EGR	Water cooled, Gasoline multi point Sequential fuel injection
No. of Cylinders	4 (inline)	4 (inline)	4 (inline)
Bore x Stroke	85 mm x 76 mm	97 mm x 100 mm	86 mm x 90 mm
Capacity	2179 cc	2994 cc	2092 cc
Max. Engine Power	103 kW, 140 Hp @ 4000 rpm	84.5 kW, 115Hp @3000 rpm	97.5kW, 131Hp @5630 rpm
Max. Torque	320 Nm @ 1700 - 2700 rpm	300 Nm @1800 - 2000 rpm	195 Nm @3750 rpm
Compression Ratio	17.2:1	17.5:1	9.6:1
Firing Order	1-3-4-2	1-3-4-2	1-3-4-2
Max. Engine Oil Capacity	7.5 Lit.	6.5 Lit.	7.0 Lit.
Min Engine Oil Capacity	5.5 Lit.	5.5 Lit.	NA
Dry Weight of Engine	235 Kg	325 Kg	195 Kg
CLUTCH			
Type	Single Plate, Dry Friction, Diaphragm Type	Single Plate, Dry Friction, Diaphragm Type	Single Plate, Dry Friction, Diaphragm Type
Outer Diameter of Clutch Lining	240 mm	240 mm	228 mm
Friction Area	503 Sq. Cm.	503 Sq. Cm.	337 Sq. Cm.
GEAR BOX			
Type	G-76-5/4-1 with Overdrive, Syncromesh on all gears	G-76-5/4-1 with Overdrive, Syncromesh on all gears	G-76-5/4-1 with Overdrive, Syncromesh on all gears
No. of Gears	5 Forward, 1 Reverse	5 Forward, 1 Reverse	5 Forward, 1 Reverse
Gear Ratios	1st: 4.1	1st: 4.1	1st: 4.1
	2nd: 2.22	2nd: 2.22	2nd: 2.22
	3rd: 1.37	3rd: 1.37	3rd: 1.37
	4th: 1.00	4th: 1.00	4th: 1.00
	5th: 0.77	5th: 0.77	5th: 0.73
	R: 3.75	R: 3.75	R: 3.40
Transfer Case (for 4x4 Variants Only)	Electrical Shift Arrangement (4H, 4L, 2H Options)	Electrical Shift Arrangement (4H, 4L, 2H Options)	NA
Drive Options (for 4x4 Variants Only)	4x2 Ratio: 1:1 4x4 High Ratio: 1:1 4x4 Low Ratio: 1:2.48	4x2 Ratio: 1:1 4x4 High Ratio: 1:1 4x4 Low Ratio: 1:2.48	NA
AXLES			
Rear Axle	Single reduction, Salisbury Type with Hypoid Gears, Semi-Floating Axle Shafts & Limited Slip Differential	Single reduction, Salisbury Type with Hypoid Gears, Semi-Floating Axle Shafts & Limited Slip Differential	Single reduction, Salisbury Type with Hypoid Gears, Semi-Floating Axle Shafts & Std differential
Rear Axle Ratio	3.73 (4/1/1)	3.34 (3/7/1)	5.375
Front Axle	Independently Suspended	Independently Suspended	Independently Suspended
Front Axle for 4x4 Variants	Automatic Hub Locks	Automatic Hub Locks	NA
Front Axle Ratio for 4x4 Variants	3.73 (4/1/1)	3.36 (3/7/1)	NA
STEERING			
Type	Collapsible Steering Column, Tilttable Power Steering, 380 mm Diameter, 4 Spoke Steering Wheel.	Collapsible Steering Column, Tilttable Power Steering, 380 mm Diameter, 4 Spoke Steering Wheel.	Collapsible Steering Column with Tilt Mechanism, Power Steering, 380 mm Diameter, 4 Spoke Steering Wheel.
Power Steering Ratio	18.2:1, 18.9:1 (alternate)	18.2:1, 18.9:1 (alternate)	18.2:1

VARIANT	XENON 2.2 DICOR (DIESEL)	XENON 3.0 DICOR (DIESEL)	XENON 2.1 MPFI (Petrol)
BRAKES			
ABS	ABS 4 Channel Optional (BOSCH 8.1)	NA	ABS 4 Channel Optional (BOSCH 8.1)
Type	Vacuum Assisted Independent Hydraulic Brakes On Front & Rear Wheels Through Tandem Master Cylinder And Tandem Booster. Cam Shaft Driven Vacuum Pump.	Vacuum Assisted Independent Hydraulic Brakes On Front & Rear Wheels Through Tandem Master Cylinder And Tandem Booster. Cam Shaft Driven Vacuum Pump.	Vacuum Assisted Independent Hydraulic Brakes On Front & Rear Wheels Through Tandem Master Cylinder And Tandem Booster. Cam Shaft Driven Vacuum Pump.
Front Brakes	281 mm Diameter Ventilated Disc Brakes With Twin Pot Calipers	281 mm Diameter Ventilated Disc Brakes With Twin Pot Calipers	290mm Diameter, 26mm Thick Ventilated Disc Brakes With Twin Pot Calipers
Rear Brakes	282 mm Diameter Drum Brakes With Auto Adjuster Lcrrv Load Conscious Pressure Reducing Valve On Rear Brakes	282 mm Diameter Drum Brakes With Auto Adjuster Lcrrv Load Conscious Pressure Reducing Valve On Rear Brakes	282 mm Diameter Drum Brakes With Auto Adjuster Lcrrv Load Conscious Pressure Reducing Valve On Rear Brakes
Parking Brakes	Cable Operated Mechanical Linkage Acting On Rear Wheels	Cable Operated Mechanical Linkage Acting On Rear Wheels	Cable Operated Mechanical Linkage Acting On Rear Wheels
ELECTRICALS			
Electrical System	12V	12 V	12 V
Alternator Capacity	125 Amperes	125 Amperes	90 Amperes
Battery	12 V, 80 Ah MF	12 V, 80 Ah MF	12 V, 80 Ah MF
PERFORMANCE			
Max. Speed	160 Kmph	143 Kmph	145 Kmph
Max. Gradeability	41% (4x2 Model, 90% (4x4 Model)	32% (4x2 Model, 70% (4x4 Model)	30%

Power & Torque Curve for 486PL (Petrol)

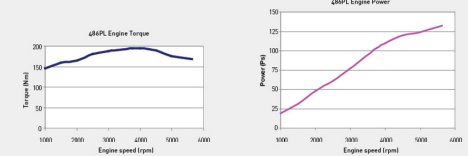

Power & Torque Curve for 2.0L & 3.0L DICOR Engine (Diesel)

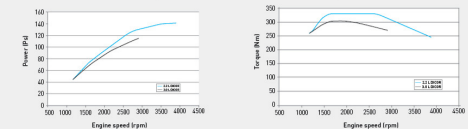

SUSPENSION	
Front Suspension	Double wishbone type with torsion bar
Rear Suspension	Parabolic leaf springs
Shock Absorbers	Hydraulic Double Acting Telescopic Type At Front And Rear
Antiroll Bar	At Front
WHEELS & TYRES	
Tyres	215/75 R16 Tubeless
Wheel Rims	5.5 J x 16 (Alloy Wheels Optional)
Spare Wheel	Steel Wheel Rim
FUEL TANK	
Capacity	65 litres

XENON FEATURES & TRIM LEVELS

FEATURES LIST	ECONOMY VARIANT	PREMIUM VARIANT
Wheel Type	Black Color Steel Wheel Rim With Silver Wheel Rim Cover	Alloy Wheels (4 Wheels)
Ventilation	HVAC	HVAC
Front Bumper	Grey	Body Coloured
Door Handles	Grey	Body Coloured
Tail Gate Handle	Grey	Body Coloured
Rear Bumper	Grey	Body Coloured
Outer Rear View Mirror	Grey	Body Coloured
Grill Finisher	Grey	Body Coloured
Door Trim	Plastic Moulded	Fabric Finished
Outer Rear View Mirror	Electrically Operated & Heated	Electrically Operated and Heated
Window Winding	Electrically Operated	Electrically Operated
Fog Lamps	Rear	Front and Rear
Music System	AM/FM Radio and CD Player	AM/FM Radio and CD Player
Radio Antenna	Yes	Yes
Central Locking	Yes	Yes
Child Lock (for Crew Cab only)	Yes	Yes
Immobilizer	Yes	Yes
Steering Wheel	Standard	Leather Covered

STANDARD FEATURES

- Cigarette Lighter
- 12V Mobile Charging Point
- Spoiler on Wiper Blade
- Roof Lamp
- Engine Compartment Lamp
- Ash Tray
- Coin Box
- Remote Fuel Lid Opening
- Cup Holders
- Rear Tubular Bumper

XENON IS AVAILABLE IN 5 COLOURS

	QUARTZ BLACK
	ARCTIC WHITE
	ARIZONA BLUE
	ARCTIC SILVER
	MINERAL RED

XENON DIMENSIONS:

SPECIFICATIONS	2.2L DICOR (DIESEL)				3.0L DICOR (DIESEL)				2.5L NEW (DIESEL)
Cab Type	Single Cab 4x2	Single Cab 4x4	Double Cab 4x4	Double Cab 6x4	Single Cab 4x2	Single Cab 4x4	Double Cab 6x4	Double Cab 6x4	Double Cab 6x4
Wheelbase (mm)	2825	2825	3150	3150	2825	2825	3150	3150	3150
Front Track (mm)	1571	1571	1571	1571	1571	1571	1571	1571	1571
Rear Track (mm)	1571	1571	1571	1571	1571	1571	1571	1571	1571
Overall Length (mm)	4800	4800	5125	5125	4800	4800	5125	5125	5125
Max. Width (mm)	1840	1840	1840	1840	1840	1840	1840	1840	1840
Front Overhang (mm)	870	870	870	870	870	870	870	870	870
Rear Overhang (mm)	1105	1105	1105	1105	1105	1105	1105	1105	1105
Overall Height Laden (mm)	1730	1730	1730	1730	1730	1730	1730	1730	1730
Overall Height Un-Laden (mm)	1745	1745	1745	1745	1745	1745	1745	1745	1745
Minimum Turning Circle Diameter (m)	11	11	12	12	11	11	12	12	12
Minimum Turning Clearance Diameter (m)	11.9	11.9	12.9	12.9	11.9	11.9	12.9	12.9	12.9
Ground Clearance (mm)	210	210	210	210	210	210	210	210	210
Kerb Weight (Kg)	1750	1840	1840	1950	1840	1950	1970	2040	1850
GW (Kg)	2950	2950	2950	2950	2950	2950	2950	2950	2950
Payload (Kg)	1200	1110	1090	1000	1090	1000	980	890	1100
GCV (Kg)	4950	4950	4950	4950	4950	4950	4950	4950	4950
Towing Capacity Unbraked Trailer (Kg)	750	750	750	750	750	750	750	750	750
Towing Capacity Braked Trailer (Kg)	2000	2000	2000	2000	2000	2000	2000	2000	2000
Max. Permissible FAW (Kg)	1400	1400	1400	1400	1400	1400	1400	1400	1400
Max. Permissible RAW (Kg)	1800	1800	1800	1800	1800	1800	1800	1800	1800
Loading Area (LxWxH) (mm/mm)	1.88 x 1.41 x 0.40	1.43 x 1.41 x 0.40	1.88 x 1.41 x 0.40	1.88 x 1.41 x 0.40	1.88 x 1.41 x 0.40	1.88 x 1.41 x 0.40	1.88 x 1.41 x 0.40	1.88 x 1.41 x 0.40	1.88 x 1.41 x 0.40



DISCLAIMER: The illustrations and photographs may show accessories and items of optional equipment which are not a part of standard specifications. Due to printing processes, colours may vary slightly from those shown. All listed specifications are current and subject to change and upgrades without prior notice, in accordance with the company's policy of continuous product improvement.